




NEW

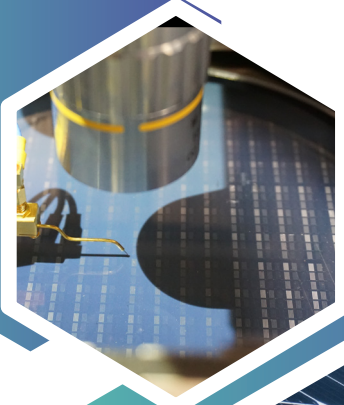

LiSaSWIR 2048

SWIR Line-scan array camera

2048x1 Pixels Resolution 8x15 μ m Pitch
Short-wave Infrared Imaging up to 1700nm
High-speed >100kHz Full Frame
Read-out noise <85e-

► Key Features

- ☐ Line-scan array
- ☐ High QE InGaAs from 900nm to 1700nm
- ☐ 2K Resolution: 2048*1 pixels
- ☐ Bad Pixels Replacement and embedded Non Uniformity Correction
- ☐ CameraLink interface
- ☐ GenICam compliant (Smart)

► Applications

- ☐ Solar panel inspection
- ☐ Wafer & semiconductor inspection
- ☐ Hot Glass inspection
- ☐ Process Sorting (food, waste,...)
- ☐ Optical Coherence Tomography (OCT)

Imagine yours...

► Preliminary Technical Specifications

Sensor	NSC2301T-SI	Frame rate	>100kHz Full resolution
Material	InGaAs	Integration Time	1µs Minimum
Resolution	2048 x 1 pixels	Trigger	Internal/External (LVTTTL)
Pixel size	8 µm x 15 µm		Software Trigger
Spectral response	0.9 to 1.7 µm		Trigger over Cameralink
Response	Linear	Trigger delay	User-Selectable
	Low, Medium & High Gain	Dimensions	58* 75 * 45.4 mm
Read-out noise	<85e- (High Gain)	Weight	<250g
	<404e- (Medium Gain)	Lens mount	C-Mount native
	<2400e- (Low Gain)	Operating Temp	-40°C to + 71 °C
Modes	ITR, IWR, ROI	Output	CameraLink Base
QE	>80%	Control	Genicam / GenCP

Products and specifications are subject to change without notice.

OEM version available on demand

Sensors
Cameras



MADE IN FRANCE

by **NIT**