

PICO384 Gen2

384 x 288 – 17 μm

The thermal image sensor Pico384Gen2 is specially designed for mass thermal detection markets.

Built on proven technology, it limits development costs and shortening time to market.

A FULL DIGITAL SURFACE MOUNT DEVICE FOR HIGH VOLUME INTEGRATION



INCREDIBLE IMAGE QUALITY



SEAMLESS INTEGRATION




OPTIMIZED TOTAL COST OF OWNERSHIP

LEISURE



SURVEILLANCE

INDUSTRY



●● FULL DIGITAL SURFACE MOUNT DEVICE FOR HIGH VOLUME INTEGRATION ●●

PICO 384Gen2



COMPACT



LONG RANGE OBSERVATION



ROBUST



FULL DIGITAL

INCREDIBLE IMAGE QUALITY

Sharp contrast	<ul style="list-style-type: none"> ■ Thermal sensitivity < 60 mK, (f/1, 300K, 50Hz) ■ [-40°C; +85°C] operating temperature range
Fluid and smooth image	<ul style="list-style-type: none"> ■ Frame rate up to 60Hz ■ Thermal time constant < 10 ms
High uniformity	<ul style="list-style-type: none"> ■ Array operability > 99.8 %


SEAMLESS INTEGRATION

Simplified electronic design	<ul style="list-style-type: none"> ■ Full access to sensor features (I²C serial link) ■ Free run or external trigger mode ■ Full digital component
High volume compliant	<ul style="list-style-type: none"> ■ Surface Mount Device (J-Lead44) ■ JEDEC's reflow and handling standards compatible

OPTIMIZED TOTAL COST OF OWNERSHIP

Simplified image processing	<ul style="list-style-type: none"> ■ Predictable behavior ■ TECless, Shutterless compatible
Battery optimization	<ul style="list-style-type: none"> ■ Low power consumption < 220 mW - 60Hz ■ Digital mode
Proven reliability	<ul style="list-style-type: none"> ■ Standards MIL810 - MIL883

Recognition distances for human measuring 1.80 m x 0.50 m

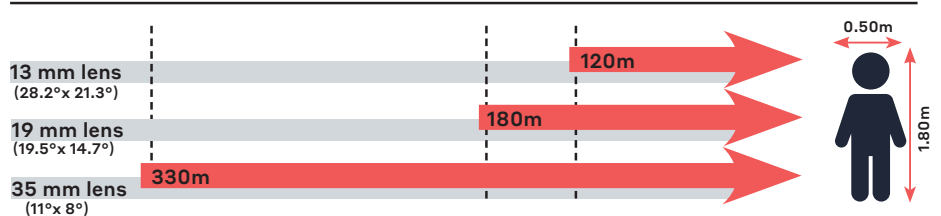

Range for Johnson's criteria, target deltaT = 2K, perfect atmospheric and optics transmissions, theoretical square pixel.



Exclusive Distributor North America

LYNRED USA
 373 Route 46 W
 Fairfield, NJ 07004
 Phone: 973-882-0211
 info@lynred-usa.com